

CVap®




HA4507 CVap® Holding Cabinet Half size, under counter model with fan Electronic differential control

General Specifications

- CVap® holding cabinets are designed for high quality holding of a wide variety of menu items for extended times.
- Patented Controlled Vapor Technology (U.S. patent #5,494,690) establishes that the water vapor content in the cabinet is the same as that of the food. This process controls moisture evaporation and saturation, so crisp foods stay crisp, moist foods stay moist.
- Electronic differential controls are easy to understand and reliable. Never require field calibration. FOOD TEMP dial allows precise control of food temperature from 90 to 180°F (32 to 82°C). FOOD TEXTURE dial maintains just-cooked texture with settings labeled proof, very moist, firm moist, and crisp.
- Built to last with quality craftsmanship, high grade stainless steel construction and full insulation on top, sides, and doors.
- Compact to fit under counters to save floor space.
- Features radial fan for improved food quality with frequent door openings, full perimeter door gaskets, magnetic door handle, lift-off door, removable side racks, and digital readout for water temperature.
- CVap equipment complies with all domestic, and most international requirements, such as UL, C-UL, UL Sanitation, CE, MEA, and others.

Functions: Proof & Hold

Capacity: 4 Sheet Pans
18" x 26" x 1.25"
(457mm x 660mm x 32mm)
8 Steam Table Pans
12" x 20" x 2.5"
(305mm x 508mm x 64mm)
4 x 2/1 Gastronorm Pans



Winston Industries, LLC.



Winston Products International, Ltd.




HA4507 CVap® Holding Cabinet

Half size, under counter model with fan

Electronic differential control

Buy Winston Service Parts
Online!
Factory direct at
www.winstonind.com

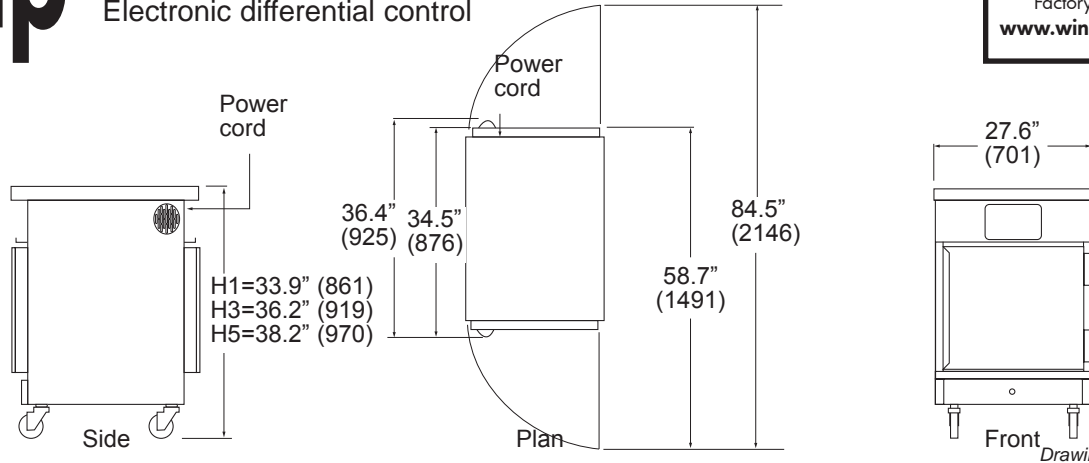

Capacity	Size in (mm)	Volts	Hertz	PH	Amps	Watts	Circuit Amps	Ship Wt lb (kg)	Ship Cube ft (M)	Class	NEMA** Plug Type
4 SP 8 STP 4 x 2/1 GP	H1= 33.9" (861) H3= 36.2" (919) H5= 38.2" (970) HT= 38.8" (986) W= 27.6" (701) WT=29.5" (749) D= 34.5" (876) DT= 37.6" (955) DP= 36.4" (925)	US/Canada									
		120	60	1	19.3	2320	US 20 CAN 30	w/skid 210 (96)	C1,3=26.6 (.75) C5=30.1 (.85)	100	 5-20P United States 5-30P Canada
International											
		230*	50/60	1	10.1	2320	N/A	w/skid 235 (107)	w/skid call factory	N/A	

SP=Sheet Pan (18"x26"x1.25") • STP=Steam Table Pan (12"x20"x2.5") • GP=Gastronorm Pan • H1=Height w/1" wheels • H3=Height w/3" casters • H5=Height w/5" casters • HT=Height w/Bumper guard • WT=Width w/Bumper guard • DT=Depth w/Bumper guard • DP=Depth w/Pass thru

Short Form Specs

Shall be Winston CVap holding cabinet, model HA4507 with electronic differential controls to provide precise food temperature from 90 to 180°F (32 to 82°C) and maintain food texture with settings labeled proof, very moist, firm moist, and crisp. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater to establish ideal water vapor content that is in relation with the moistness characteristics for the food. Uniflo airflow design provides even heat distribution.

Construction

Materials: To be commercial and institutional grade stainless steel to provide ease of cleaning and long service life with reasonable use and care.

Rack supports: Adjustable, normally spaced 3.5" (89 mm), to receive 4 sheet pans, 8 steam table pans, or 4x2/1 gastronorm pans. Removable for easy cleaning.

Doors: Field reversible hinges to allow door lift-off to facilitate cleaning. Magnetic door handle.

Casters: Includes 2 locking, 2 non-locking, heavy duty, non-marking.

Insulation: Full-perimeter.

Controller: Electronic differential control with dials labeled Food Temp and Food Texture.

Water fill: Operated manually. Low mineral potable water is recommended, otherwise use deionizer/demineralizer to minimize corrosive damage.

Ventilation: Allow 2" (51mm) clearance on sides, particularly around ventilation holes. Install with supplied legs or casters. Refer to use & care manual for specific installation instructions. Generally this appliance doesn't need to be installed under a mechanical ventilation system (vent hood). Check local health and fire codes for requirements specific to your location.

Electrical: Supplied with 84" (2134mm) (minimum) power cord and plug. **Tested in accordance with UL 197 at the rated voltage, hertz, and phase. The input average current did not exceed the allowable amperage for the circuit listed.

Load limit: 65 lbs. (29.25 kg) per rack.

Warranty

Limited 1 year warranty (excluding gas-kets, lamps, hoses, power cords, glass panels, and evaporators). Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

Model

HA4507

Description

CVap holding/proof, fan

Customer should specify the following when ordering:

1. Hinge preference (left or right) (no additional cost).
2. Wheel or caster preference.
3. Any added options or accessories.

* Inquire about additional international voltages available.

Options

Wheels/Casters	Choice of 1" (25mm) wheels or 3" (76mm) casters. 5" (127mm) casters are optional upgrade
Pass Thru Window	Second door on back of cabinet Window in door
Pass thru/Windows	Second door on back of cabinet, windows in both doors
Bumper Guard	Full-perimeter bumpers with 5" (127mm) casters (2 locking)
Solid Rack Supports	Solid stainless steel rack supports (replaces standard wire rack supports)
Water Fill System	Automatic water fill system
Extended Warranty	Adds parts and labor warranty coverage for one additional year

Optional Items

PS2078	Stack kit w/air space, heavy duty
PS2090	Leg & shelf kit
PS2192/12	ScaleKleen packets (12 pack)
PS2206/4	Wire rack/tray (4-pack)
PS2305	One additional shelf rack (2 required)

Options and optional items available for an additional cost.

Winston Industries, LLC.



Winston Products International, Ltd.

2345 Carton Drive • Louisville, KY 40299 USA • (800) 234-5286 • (502) 495-5400 • Fax: (502) 495-5458 • www.winstonind.com

Printed in USA.

Specifications subject to change without notice.

4272V028 Rev 23
rs 04-16-09